

Abyssinia Journal of Engineering and Computing

An Economic Feasibility Study of Solar and Diesel Water Pumping Systems for Irrigation in Ethiopia: A Case Study of Kombolcha, Wollo

Hailemariam Berhanu ^{a*}, Fiseha Bogalea ^a, Alemshet Abebe ^a, Mengistu Manaye ^b

^a Department of Mechanical Engineering, Kombolcha Institute of Technology Wollo University, Ethiopia. ^b Department of Industrial Engineering, Kombolcha Institute of Technology, Wollo University, Ethiopia.

How to cite this paper: <u>https://xxxx*</u>

©2022 Kombolcha Institute of Technology, Wollo University



ISSN : 2788-6239 (Print) ISSN: 2788-6247 (online)

*Corresponding Author: hailemariam0565@gmail.com

ABSTRACT

This paper presents the study of economic feasibility analysis of solar water pumping systems compared to diesel based water pumping systems. The study is highly essential for countries with agriculture based economies like Ethiopia. The main disadvantages of the diesel based water pumping system are high fuel cost and abnormal CO₂ emission around 2.3 kg/lit to the atmosphere in Ethiopia. These drawbacks can be solved by a solar water pumping system due to mark-able solar potential in many parts of the country. The total expenditure of both systems was calculated. In addition, the total revenue of both systems was estimated. With the suitable cash inflows and cash outflows the method of Profitability Index has been used in this study. Furthermore, the salvage value and life cycle cost of both systems were assessed. The Profitability Index of the solar water pumping system was found to be 3.2, whereas the diesel based water pumping system was only 0.06. The life cycle cost of the solar water pumping system was estimated to be 218,324.3 ETB (Ethiopia Birr), whereas the diesel based water pumping system was only 1,127,116 ETB. From these results, it can be concluded that the solar water pumping system is the best choice for installation.

Keywords: Agriculture, Diesel Based Water Pump, Economic Analysis, Renewable Energy, Solar Water Pump.

1. INTRODUCTION

Energy is the most fundamental necessity of every person on the earth and it is now more important than ever. The energy produced obtained from fossil fuels is widely used but it is non-renewable and environmental non friendly due to greenhouse effects caused by the emission of harmful greenhouse gases including CO₂, CO, S, NOx, and others. These gases not only hurt people by causing heart problems and skin conditions, but they also contribute to global warming by releasing carbon dioxide into the environment. Therefore, utilizing renewable energy sources, especially photovoltaic (PV), wind, solar thermal, and biomass sources is essential for energy generation. One of these, PV produces direct current from solar radiation making it very effective in rural places. Based on actual requirements and advantages for powering irrigation pump sets for rural lighting and electrification, concentrated power generation, urban applications, highway lighting, etc., there is huge potential for off-grid deployment in Kombolcha, Ethiopia since the average solar radiation in this area is above 5.5KWh/day-m2 as presented in Figure 1 and Table 1.1.

In the 1970s, the first solar-powered pumps were constructed. However, due to the high cost of solar panels, it was not feasible for agricultural use until 2009. When the cost of solar panels began to fall dramatically, solar technology became more viable for agricultural use. It begins to use this resource for water pumping, energy production, food preparation, and climate change around the world as a result of consistently lowering its prices. Many countries have begun to create solar water pumping system plans to speed their implementation due to cost reductions and increased awareness of the potential benefits of this technology [1].

Currently, some developing countries have progressed agriculture beyond just being a local food self-sufficient activity. Recently, agriculture is playing a key role in the social and economic development of many communities in the world. Agriculture, like other activities, is currently attempting to incorporate sustainability actions, including the reduction in energy consumption, the diminishment of environmental impact, and the preservation of natural resources, such as water and soil [2].

Many scholars have conducted cost-benefit comparison of diesel versus solar-energy-derived water pumping using various approaches. Based on the design, investment, and yearly return, AmritKarki and Sunil Prasad Lohan developed a techno-economic analysis of solar water pumping systems. The discounted payback period was nine years, which is within the system's lifetime according to the reports. Other economic criteria were examined, such as the 1.6 benefit-cost ratios and the 18.15 percent internal rate of return [2].

D.C Gokhale conducted a research on the importance of solar-powered agriculture pumps and the technology behind them. The findings demonstrated that solar-powered agriculture has a larger initial investment, more reliable, environmentally benign and requires very little maintenance. These are the major advantages of solarpowered agriculture [4].

Rosa J. Chilundo conducted research on solar water pumping system design and performance5. An extensive literature review was made in this article on the design and performance of solar technology for water pumping as well as the optimal transition viewpoint for developing countries' energy demands [5].

Senol et al. investigated a mobile PV-powered water pump system for irrigation of a 0.5 hectare (5000 m2) apple orchard in Turkey. Irrigation of the apple orchard takes place from May to October, with a daily water requirement of 17 m3/day that meets within three days of pumping each week. For a total dynamic head (TDH) of 20 m, a PV system with an angle of 22degreesand a power of 460 kW was examined [6].

Irrigation access is under pin the global food and livelihood security which is deemed critical to sustainable agricultural growth and economic development. Sustainable agriculture is central in achieving many of the sustainable development goals including poverty alleviation, food security, livelihood security and sustainable ecosystems [7].

Water pumping devices obtained from solar and wind energy was studied by Javier Cuellar et al. as a cost-effective alternative for agricultural irrigation [7]. The findings suggested that pumping systems based on renewable energy (wind and solar) can supply the irrigation water demands of small farmers in Northern Colombia. Even when no capital investment is required, diesel based water pumping systems are the least costeffective since it consumes a fuel.

D C Gokhale et al. reviewed different articles on solarpowered agriculture pumps and its economic Feasibility. The solar-powered pumping system with brushless direct current (BLDC) motor is a cost effective solution in the long run. Though the initial investment is high, Government of India is supporting the farmers by providing subsidies. This system also has the potential to replace fuel-operated and electrical pumps; thereby providing a sustainable solution for meeting the irrigation requirements of crops [9]. Ndeulita Naukushu et al. conducted research on replacing diesel with solar PV. An increasing global population has brought with it social ills and food insecurity. Due to these social problems, it has become increasingly important for farmers to innovate how they conduct farming activities in a way that allows them to produce more and better crop yields. Their findings from the literature review revealed that solar irrigation systems are more economically and environmentally feasible than diesel-powered systems and other conventional irrigation systems since solar systems have low maintenance costs, low operation costs and no fuel costs [10]. This literature indicates the economical drawbacks of diesel water pumping systems due to the increasing diesel price globally from time to time. So, the use of a diesel based water pumping system is not profitable for the farmer especially in developing countries. The economic growth of a developing country such as Ethiopia is purely dependent on agriculture. If the alternative to the diesel pump is suggested cultivation, the economic growth will be increased hugely. The use of profitable and eco-friendly alternative energy sources is one of the best solutions. Out of the various alternative energy sources, solar energybased pumping systems are discussed in the present paper due to its high energy potential. Furthermore, such a solar-based agriculture system will certainly improve farmers' living standards. But still, diesel based water pumping is applicable in every part of the country for irrigation purposes. This technology has a high running cost due to high fuel consumption. In addition, the diesel based water pumping system pollutes the environment by emitting carbon dioxide [11].

CO2 emission of diesel (change this word)to be 2.3 kg/lit [12]. Approximately, greenhouse gases (GHG)

emissions from fossil fuels in Ethiopia were 9.54 million tons in 2015 [13]. This implies that, in 2015, a \$5 per ton price on emissions, based on the carbon content of fuels, would have raised \$47.7 million and a \$3 price on carbon would have raised \$286 million. In our policy scenarios, with the price on carbon rising to \$30/ton in 2030, total revenue from the carbon tax can be as high as \$800 million in that year, depending on the scenario [14].

The continuous depletion of fossil fuel reserves and growing awareness of their environmental impact promote the development of more sustainable energy supply options. These issues have triggered the researchers to find sustainable sources all over the world [15].

Therefore, due to the fossil fuel resources depletion and their great share in environmental pollution and other issues many countries and researchers are looking for green energy resources based on each region's potential. So far, many kinds of renewable energy sources such as solar, wind, geothermal and others are utilized for power generation to minimize the above stated problems [16].

In this study, it is found that the essentialities of introducing solar water pumping systems to the community of Ethiopia. In the present paper the advantage of the solar water pumping system over existing conventional diesel based water pumping systems is presented.

2. MATERIALS AND METHODS


2.1 Description of the study area and data collection for the proposed systems

The project is located in Kalu Woreda, near to Kombolcha city and the South Wollo Administration Zone of the Amhara Regional State, Ethiopia as shown in Figure 1. Data presented in table 1 were collected from systematically selected groups of farmers and meteorological sources in order to make the economic analysis of both systems for comparison.



Fig. 1 Google map reference of the study area Kombolcha, Ethiopia [17]

| Parameters | Values | | |
|--|---|--|--|
| Daily water demand over the selected site(Col- | 360 m3/day (0.25 m3/min) | | |
| lected from group of farmers) | | | |
| Operating time of the pumping system Collected | 12 days/year @ 6 hour/day for two crop seasons; | | |
| from group of farmers) | | | |
| Farmer's area used for cultivation. | 5000 m2 (0.5 hectare) | | |
| | | | |
| Fuel consumption for diesel water pumping system | 200 letter/year for 12 days/year and it is also for | | |
| (Collected from group of farmers) | two crop seasons | | |
| Current price of fuel (diesel) as per financial year | 25 ETB/litter | | |
| 2021 (Collected from sources of market) | | | |
| Average solar radiation and peak sunshine hours | 5.5 kWh/day-m2 and 5.5 sun shine hours/day | | |
| [17]. | under Standard Test Conditions (STC) | | |



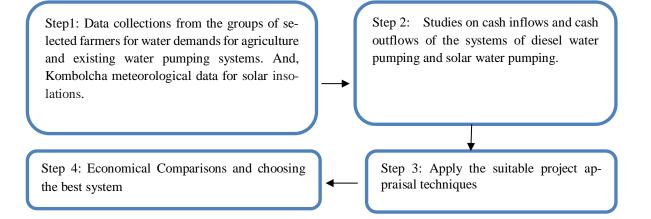


Fig. 2 Systematic representation of the research methodology used in the study

The first task of this study was collecting the necessary data from the selected study area. Geographical, technical, and economic data were collected related to the existing diesel based water pumping and solar-driven water pumping systems in the study area, Kombolcha, Ethiopia.

2.2 Estimation of cash outflows and inflows of the two systems

As part of the study, costs of the installation, fuel, operation and maintenance of both diesel and solar water pumping systems were estimated. Cash inflow (in the form of revenue and the system's end value) and cash outflows (investment and loans taken from the financial institutions) of the project was forecasted based on the present realistic assumptions as it explained below:

2.2.1 Estimation of cash outflows for the diesel based water pumping system

During the study period made in the year 2021, the investment cost of a diesel based water pumping system was 27,000 ETB for pumping water 360 m3/day, which is required to supply for irrigating 0.5 hectare. The pump replacement is essential for every 10 years due to wear and tear. At the inflation rate 5% per year, the replacement cost will become 43,980 ETB. In the 20 years period, the total installation cost will become 70,980 ETB.

Estimation of operator wages: The operator of the diesel based water pumping system during drought periods operates the machine maximum for 12 day in a year. The wages of the operator from the survey is considered 500 ETB/day. Therefore, the wages of the operator in a year will become 6000 ETB.

Estimation of maintenance cost: The annual maintenance cost is the sum of operator wages and pump maintenance. The pump maintenance cost for both crop seasons(summer and winter) is considered to be 20% of the total wages (Misrak Girma, 30 June 2015).Therefore, pump maintenance cost will become 20% of wages i.e, 20% of 6,000 ETB. It becomes 1200 ETB. Then, to all expenditure on maintenance will thus become 7200 ETB/year.

Estimation of fuel cost: As per market value in 2021, the cost of Diesel was 23.75 ETB / liter. As per the survey report collected from a group of farmers the pump is expected to operate for 12 days in a year. During the 12 days, the survey report revealed the fuel consumption was 200 liters. As per above, annual present fuel cost (PFC) will become 4,750 ETB.

Estimation of fuel cost for 20 years life time of the pump: The fuel cost for a certain period can be calculated based on the relation

$$FC = P_{FC}(1+i)^n \qquad (1)$$

In equation 1, PFC is the present fuel cost, and n is the life time of the pump i.e., 20 years, and, 'i' is the inflation rate i.e, 15.8 % [12]. A fuel cost escalation of 15.8% has been assumed but the fact remains that this is an indeterminable parameter as it depends on oil reserves, conflict in oil producing countries and exchange rate. Therefore, cash outflows of the proposed system are estimated in Table 2.

The total cash outflow is not only the MC. It also includes the installation cost, the pump replacement cost, and fuel cost (624,446.70 ETB for 20 years as stated in Table 2). The cost of the diesel pump 3.7 kW capacity is 27,000 ETB. Due to 10 year life time the pump replacement is essential and its cost is 43,980.20 ETB (it includes the inflation rate). Therefore, the total cash outflow including MC, it becomes 1,130,369.90 ETB.

2.2.2 Estimation of cash inflow for the diesel based water pumping system in comparison with solar pumping system

The initial investment for solar pump and diesel based water pumping system are respectively 93,600 ETB (as per section C) and 31,750 ETB with respect to Table 2 respectively. The difference of the above will become the return on the diesel based water pumping system and can be considered as its cash inflow.

| Time, in | FC (ETB) | Cash outflow in terms of MC, in ETB | Cumulative Cash out- flow (FC&MC) in, ETB | |
|--------------|---------------------------|-------------------------------------|--|------------------------------|
| years (i) | (EIB) (ii) | (iii) | in ETB (iv = ii+iii) | $(v) = \sum_{i=0}^{20} (iv)$ |
| 0 | 4750 | First pump is installed. | 4750 | 4750 |
| 1 | 5500.5 | 7920 | 13420.5 | 18170.5 |
| 2 | 6369.6 | 8712 | 15081.6 | 33252.1 |
| 3 | 7376 | 9583.2 | 16959.2 | 50211.3 |
| 4 | 8541.4 | 10541.5 | 19082.9 | 69294.2 |
| 5 | 9890.9 | 11595.7 | 21486.6 | 90780.8 |
| 6 | 11453.7 | 12755.2 | 24208.9 | 114989.7 |
| 7 | 13263.4 | 14030.8 | 27294.2 | 142283.9 |
| 8 | 15359 | 15433.8 | 30792.8 | 173076.7 |
| 9 | 17785.7 | 16977.2 | 34762.9 | 207839.6 |
| 10 | 20595.8 | Replaced the first pump. | 20595.8 | 228435.4 |
| 11 | 23850 | 20542.4 | 44392.4 | 272827.8 |
| 12 | 27618.3 | 22596.7 | 50215 | 323042.8 |
| 13 | 31981.9 | 24856.4 | 56838.3 | 379881.1 |
| 14 | 37035.1 | 27342 | 64377.1 | 444258.2 |
| 15 | 42886.6 | 30076.2 | 72962.8 | 517221 |
| 16 | 49662.7 | 33083.8 | 82746.5 | 599967.5 |
| 17 | 57509.4 | 36392.2 | 93901.6 | 693869.1 |
| 18 | 66595.9 | 40031.4 | 106627.3 | 800496.4 |
| 19 | 77118.1 | 44034.5 | 121152.6 | 921649 |
| 20 | 89,302.70 | 48,438.00 | 137740.7 | 1059390 |
| | $\sum_{i=0}^{20} (FC_i).$ | $\sum_{i=1}^{20} (MC_i).$ | $\sum_{i=0}^{20} (FC_i + MC_i).$ | Cumulative FC&MC = |
| | = 624,446.7 | 434,943 | = 1059390 | 1059390 |

Table 1. Consolidation of cash outflows for diesel based water pumping system for 20 Years

FC: Fuel cost; MC: Maintenance cost; RC Replacement Cost; TC: Total Cost; ETB: Ethiopia Birr

Thus, 61,850 ETB were found as cumulative income/inflow throughout the project duration. But, the returns during subsequent years after installation of the diesel based water pumping system were neglected. The returns after the installation of the solar pump were expected to be present, since it involves no fuel cost, no replacement cost and very less maintenance cost.

2.2.3 Estimation of cash outflow for the solar water pumping system

The market price as per year 2021 for 1 watt capacity PV installation was 20 ETB. But, the PV array is designed with 8 numbers of panels, of each capacity 315 W. This array is suitable for lifting 360 m3/day of water for irrigation. Thus, the array's power generation becomes 2520 W. The installation cost of PV array as per market price was 50,400 ETB. Apart from the PV array; the solar water pump, its controller, storage battery, and valve fittings are essential. Their market value in the

same year was 43,200 ETB. Therefore, the total installation cost of solar water pumping becomes 93,600 ETB.

Estimation of Cost for Wages: Similar to the diesel based water pumping system, the wages for operating the solar pump system can be considered 6000 ETB/year for two crop seasons.

Estimation of Maintenance Cost: A little maintenance is required for cleaning the surface of the PV panel. Its cost is considered to be 2 % of Cost for wages for the two crop seasons in a year. Therefore, the annual maintenance cost for this system becomes 120 ETB / year. Thus, the sum of cost for wages and maintenance of the PV system becomes 6,120 ETB/year. Whereas, these costs for the diesel based water system was 7200 ETB/year as per previous discussion mentioned in section A. Therefore, the savings on maintenance, which is highly significant, becomes 1080 ETB/year. The cash outflow of the proposed PV pumping system is estimated and tabulated in table 3. The cash flow of the investment project is forecasted based on the present realistic assumptions.

 Table 3. Consolidation of the cash outflow of solar water pumping system

| | Cash outflow | Cumulative cash |
|----------|--------------|--------------------------------|
| Time, in | in terms of | outflow (MC), in |
| years | MC, | ETB |
| (i) | in ETB | (iii) |
| ~ / | (ii) | $(iii) = \sum_{i=0}^{20} (ii)$ |
| 0 | | |
| 1 | 6181.2 | 6181.2 |
| 2 | 6243 | 12424.2 |
| 3 | 6305.4 | 18729.6 |
| 4 | 6368.5 | 25098.1 |
| 5 | 6432.2 | 31530.3 |
| 6 | 6496.5 | 38026.8 |
| 7 | 6561.5 | 44588.3 |
| 8 | 6627.1 | 51215.4 |
| 9 | 6693.4 | 57908.8 |
| 10 | 6760.3 | 64669.1 |

| 11 | 6827.9 | 71497 |
|----|---|----------------------------|
| 12 | 6896.2 | 78393.2 |
| 13 | 6965.1 | 85358.3 |
| 14 | 7034.8 | 92393.1 |
| 15 | 7105.1 | 99498.2 |
| 16 | 7176.2 | 106674.4 |
| 17 | 7247.9 | 113922.3 |
| 18 | 7320.4 | 121242.7 |
| 19 | 7393.6 | 128636.3 |
| 20 | 7467.6 | 136103.9 |
| | $=\sum_{i=1}^{20} (MC_i)$ 136,103.90 | Cumulative MC = 136,103.90 |

In the above, the initial investment cost was not considered to obtain the total cash outflows. The investment cost is a little high for installation of solar water pumping system and found 93,600 ETB. It includes the solar panel cost of capacity 2520 W and 3.7kWpump capacity. Therefore, along with cumulative MC, the total cash outflow becomes 136,103.9 ETB.

2.2.4 Estimation of cash inflow for the solar water pumping system

Solar pumping system does not involve fuel. Therefore, diesel cost in the diesel based water pumping system shall become the return for this system. Furthermore, the solar pump does not require replacement. Since, its life time is 20 years. Therefore, the returns for the proposed solar water pumping system were high and very significant. The cash inflows of this system are estimated and presented in Table 4.

Solar water pumping systems do not require pump's replacement. But, DWPS required the pump replacement. Therefore, the concerned replacement cost 43980.2 ETB shall become the additional revenue to SWPS system. Therefore, the total returns were found to be 733,668.5 ETB.

| Time, in years | Revenue occurrence by saving the fuel, | Revenue occurrence by minimizing MC,Total revenue in the form of fuel savings | | Cumulative Revenue / Cash inflow, |
|----------------|---|---|--|---|
| | in ETB | in ETB | and MC, in ETB | in ETB $\sum_{i=1}^{20} \sum_{j=1}^{20} \sum_{i=1}^{20} \sum_{j=1}^{20} \sum_{j=1}^{20} \sum_{i=1}^{20} \sum_{j=1}^{20} \sum_{i=1}^{20} \sum_{j=1}^{20} \sum_{i=1}^{20} \sum_{j=1}^{20} \sum_{j=1}^{20} \sum_{i=1}^{20} \sum_{j=1}^{20} \sum_{j=1}^{$ |
| (i) | (ii) | (iii) | (iv) = (ii) + (iii) | $(\mathbf{v}) = \sum_{i=0}^{20} (iv)$ |
| 0 | 4750.0 | 0.0 | 4750 | 4750 |
| 1 | 5500.5 | 1188.0 | 6688.5 | 11438.5 |
| 2 | 6369.6 | 1306.8 | 7676.4 | 19114.9 |
| 3 | 7376.0 | 1437.5 | 8813.5 | 27928.4 |
| 4 | 8541.4 | 1581.2 | 10122.6 | 38051 |
| 5 | 9890.9 | 1739.4 | 11630.3 | 49681.3 |
| 6 | 11453.7 | 1913.3 | 13367 | 63048.3 |
| 7 | 13263.4 | 2104.6 | 15368 | 78416.3 |
| 8 | 15359.0 | 2315.1 | 17674 | 96090.3 |
| 9 | 17785.7 | 2546.6 | 20332.3 | 116422.6 |
| 10 | 20595.8 | | 20595.8 | 137018.4 |
| 11 | 23850.0 | 3081.4 | 26931.3 | 163949.7 |
| 12 | 27618.3 | 3389.5 | 31007.8 | 194957.5 |
| 13 | 31981.9 | 3728.5 | 35710.4 | 230667.9 |
| 14 | 37035.1 | 4101.3 | 41136.4 | 271804.3 |
| 15 | 42886.6 | 4511.4 | 47398.1 | 319202.4 |
| 16 | 49662.7 | 4962.6 | 54625.3 | 373827.7 |
| 17 | 57509.4 | 5458.8 | 62968.3 | 436796 |
| 18 | 66595.9 | 6004.7 | 72600.6 | 509396.6 |
| 19 | 77118.1 | 6605.2 | 83723.3 | 593119.9 |
| 20 | 89302.7 | 7265.7 | 96568.4 | 689688.3 |
| | Revenue Σ^{20} (EC) | Revenue. Σ^{20} (MC) | Total Revenue. Σ^{20} (EC + MC) | Total Revenue, |
| | $\sum_{i=0}^{20} (FC_i).$ | $\sum_{i=1}^{20} (MC_i)$ | $\sum_{i=0}^{20} (FC_i + MC_i)$ | TR = |
| | = 624,446.7 | = 65,241.6 | = 689,688.3 | = 689,683.3 |

| Table 4. Consolidation of | cash inflows | of solar water | pumping system | 1 for 20 years |
|---------------------------|--------------|-----------------|-------------------|----------------|
| rucie il componidation or | ••••••••• | or borter merer | peripring by been | 1101 =0 jeano |

2.3 Methods for checking economic feasibility

Commonly, in order to check the economic feasibility of the proposed systems the following methods have been used. They are named Net present value (NPV), Payback Period (PBP), Profitability Index (PI), Life Cycle Cost Analysis (LCCA).

2.3.1 Determination of annual NPV

As presented in table no. 3 and table no. 4, the cash inflows and cash outflows were estimated. Therefore, the NPV of two systems can be determined using the equation (2). As it is known, NPV is the most acceptable measure for appraisal technique for a project.

Mathematically:

$$NPV = \sum_{t=0}^{20} [B_t - C_t] = [B_0 - C_0] + [B_1 - C_1] + [B_2 - C_2] + \dots + [B_{20} - C_{20}]$$
(2)

Where, Btand Ct are cash inflow and cash outflow respectively in't' years and't' varies from 0thyear to 20th year [18].

| Fin | ding NPV of Sola | r Water Pumpin | g System | Findi | ng NPV of Diese | l Based Water Pur | nping System |
|----------------------------|--|--|--|------------------------------|--|---|---|
| Timein 't' years (i) | B _t , Cash inflow from table no. 4, in ETB (ii) | C _i , Cash outflow from table no. 3, in ETB (iii) | B _t -C _t in ETB, (iv (iv)= (ii)- (iii) | Time, in 't' years (v) | B ₁ , Cash inflow from Section B, in ETB (vi) | C ₁ .,Cash outflow from table no.2, in ETB (vii) | $\begin{array}{l} B_{r}-C_{t} \text{ in ETB} \\ (v \text{iii}), \\ (v \text{iii}) = \\ (v \text{i})- (v \text{ii}) \end{array}$ |
| 0 | 4750 | 93,600 | -88,850 | 0 | 61,850 | 31750 | 30,100 |
| 1 | 6688.5 | 6181.2 | 507 | 1 | 0 | 13420.5 | -13,421 |
| 2 | 7676.4 | 6243 | 1,433 | 2 | 0 | 15081.6 | -15,082 |
| 3 | 8813.5 | 6305.4 | 2,508 | 3 | 0 | 16959.2 | -16,959 |
| 4 | 10122.6 | 6368.5 | 3,754 | 4 | 0 | 19082.9 | -19,083 |
| 5 | 11630.3 | 6432.2 | 5,198 | 5 | 0 | 21486.6 | -21,487 |
| 6 | 13367 | 6496.5 | 6,871 | 6 | 0 | 24208.9 | -24,209 |
| 7 | 15368 | 6561.5 | 8,807 | 7 | 0 | 27294.1 | -27,294 |
| 8 | 17674 | 6627.1 | 11,047 | 8 | 0 | 30792.8 | -30,793 |
| 9 | 20332.3 | 6693.4 | 13,639 | 9 | 0 | 34762.9 | -34,763 |
| 10 | 64576 | 6760.3 | 57,816 | 10 | 0 | 64576 | -64,576 |
| 11 | 26931.3 | 6827.9 | 20,103 | 11 | 0 | 44392.4 | -44,392 |
| 12 | 31007.8 | 6896.2 | 24,112 | 12 | 0 | 50214.9 | -50,215 |
| 13 | 35710.4 | 6965.1 | 28,745 | 13 | 0 | 56838.3 | -56,838 |
| 14 | 41136.4 | 7034.8 | 34,102 | 14 | 0 | 64377.1 | -64,377 |
| 15 | 47398.1 | 7105.1 | 40,293 | 15 | 0 | 72962.8 | -72,963 |
| 16 | 54625.3 | 7176.2 | 47,449 | 16 | 0 | 82746.5 | -82,747 |
| 17 | 62968.3 | 7247.9 | 55,720 | 17 | 0 | 93901.6 | -93,902 |
| 18 | 72600.6 | 7320.4 | 65,280 | 18 | 0 | 106627.3 | -106,627 |
| 19 | 83723.3 | 7393.6 | 76,330 | 19 | 0 | 121152.6 | -121,153 |
| 20 | 96568.4 | 7467.6 | 89,101 | 20 | 0 | 137,740.70 | -137,741 |
| | $= \sum_{i=0}^{20} (C_{if})$ 733,668.5 | $\sum_{i=0}^{20} (C_{of}) = 229,704$ | NPV = 503,965 | | $\sum_{i=0}^{20} (C_{if})$ = 61,850 | $ \frac{\sum_{i=0}^{20} (C_{of})}{=} \\ 1,130,370 $ | .NPV = -1068,5220 |

Table 5. Estimation of net present value of two systems

NPV: Net Present Value; $\sum_{i=0}^{20} (C_{if})$: Total Cash inflow; $\sum_{i=0}^{20} (C_{of})$: Total Cash outflow.

From the data presented in Table 5, the NPV of the solar PI is the ratio of cumulative present value of all cash inflows to cumulative present value of all cash outflows of **2.3.2 Determination of profitability index (PI) of two systems**

a project [18]. It indicates the capacity of profit generation water pumping system is positive and found extremely higher than the diesel based water pumping system.

$$PI = \frac{Cumulative \ cash \ inflow}{Cumulative \ cash \ out \ flow}$$
(3)

| SV of Solar water pumping system | | | SV of Diesel based water pumping system | | | nping system | | |
|----------------------------------|--|--|---|--------------|--------------|--|--|--|
| Time, in 't' years (i) | CC from table no. 3, in ETB (ii) | Depreciation factor at @ 10%* (iii) | SV in ETB (iv) (iv) = (ii)×(iii) | Time, in 't' | years (i) | CC from table no. 2, in ETB (ii) | Depreciation factor at @ 10%* (iii) | SV in ETB (iv) (iv) = (ii)×(iii) |
| 0 | 93600 | 1.0 | 93600.0 | | 0 | 27000 | 1.0 | 27000.0 |
| 1 | 93600 | 0.9 | 84240.0 | | 1 | 27000 | 0.7 | 19170.0 |
| 2 | 93600 | 0.8 | 75816.0 | | 2 | 27000 | 0.5 | 13610.7 |
| 3 | 93600 | 0.7 | 68234.4 | | 3 | 27000 | 0.4 | 9663.6 |
| 4 | 93600 | 0.7 | 61411.0 | | 4 | 27000 | 0.3 | 6861.2 |
| 5 | 93600 | 0.6 | 55269.9 | | 5 | 27000 | 0.2 | 4871.4 |
| 6 | 93600 | 0.5 | 49742.9 | | 6 | 27000 | 0.1 | 3458.7 |
| 7 | 93600 | 0.5 | 44768.6 | | 7 | 27000 | 0.1 | 2455.7 |
| 8 | 93600 | 0.4 | 40291.7 | | 8 | 27000 | 0.1 | 1743.5 |
| 9 | 93600 | 0.4 | 36262.6 | | 9 | 27000 | 0.0 | 1237.9 (SV of original pump) |
| 10 | 93600 | 0.3 | 32636.3 | | 10 | 43980 (Replacem ent Cost) | 1.0 | 43980.0 |
| 11 | 93600 | 0.3 | 29372.7 | | 1 | 43980 | 0.7 | 31225.8 |
| 12 | 93600 | 0.3 | 26435.4 | | 2 | 43980 | 0.5 | 22170.3 |
| 13 | 93600 | 0.3 | 23791.9 | | 3 | 43980 | 0.4 | 15740.9 |
| 14 | 93600 | 0.2 | 21412.7 | | 4 | 43980 | 0.3 | 11176.1 |
| 15 | 93600 | 0.2 | 19271.4 | | 5 | 43980 | 0.2 | 7935.0 |
| 16 | 93600 | 0.2 | 17344.3 | | 6 | 43980 | 0.1 | 5633.9 |
| 17 | 93600 | 0.2 | 15609.8 | | 7 | 43980 | 0.1 | 4000.0 |
| 18 | 93600 | 0.2 | 14048.9 | | 8 | 43980 | 0.1 | 2840.0 |
| 19 | 93600 | 0.1 | 12644.0 | | 9 | 43980 | 0.0 | 2016.4 (SV of replaced pump) |
| 20 | 93600 | 0.1 | 11,379.6 | | 10 | SV of or replaced die | | 3,254.3 |

Table 2. Estimation of salvage value of the two systems

(*Source for depreciation rate: 'ATO Depreciation rate'; https://www.depreciationrates.net.au/pu

From Table 5, For solar water pumping system:

$$PI = \frac{733668.5}{229704} = 3.194 \approx 3.2$$

For diesel water pumping system:

$$PI = \frac{66,600}{1130370} = 0.0589 \approx 0.06$$

From the results of equation 3, the PI of the solar water pumping system is much higher when compared to diesel based water pumping system. Therefore, the solar water pumping system can be selected for the installation.

2.3.3 Estimation of payback period (PBP) of the two systems

By definition, the PBP is the number of years that it takes to recover the investment¹⁹. It will be estimated by adding net cash flow in the project until the cumulative net cash flow equal to initial investment.

$$PBP = \frac{Capital Cost of the Project}{Net Annual Cash Inflow}$$
(4)

The actual capital cost for the solar pumping system is obtained by subtracting the solar pumps initial cost (93,600 ETB) and the diesel pump's replacement cost (43,980.2 ETB). Since, solar pumping system does not required pump replacement during the first twenty years. The net annual cash inflow for this system is the sum of fuel saving cost (4,750 ETB) and savings in MC (1,080 ETB).

For diesel based water pumping system, no PBP, from table no. 5, NPV is negative.

2.3.4 Estimation of LCC of two systems

LCC is useful for estimating the net expenditure of the two water pumping systems. It is the difference between the total costs of installation, maintenance, running etc, throughout the system's lifetime and its salvage value / end value (H. Bierman, 1993)

Accordingly,

LCC = TC - LCC = (CC + FC + MC + RC) - SV (5)Where,

CC is the capital cost or installation cost FC is the total fuel cost during system's lifetime

MC is the maintenance cost during system's lifetime RC is the replacement cost during system's lifetime SV is the salvage value of the system

S V is the salvage value of the system

The salvage value (SV) of a system or end values of a system is the net amount of money obtainable from the sale of used property [19]. It is estimated using a diminishing balancing method, since a depreciating asset decreases more in the early years of its effective life. It is one of the depreciation appraisal techniques. Mathematically,

$$SV = CC(1-r)^n$$
 (6)

In equation 6, r is the depression rate of the asset due to wear and tear, corrosion, accident, and deterioration, during its lifetime and, $(1-r)^n$ is called depreciation factor [20].

3. RESULTS AND DISCUSSION


In this section, the economic feasibility aspects of the two systems were presented from the analysis made in previous sections and compared their results graphically.


| | Cost for solar | Cost for diesel | | |
|--------------|----------------|-------------------|--|--|
| Type of cost | water pump- | based water pump- | | |
| Type of cost | ing system, in | ing system, in | | |
| | ETB | ETB | | |
| CC | 93,600 | 27,000 | | |
| Life Time | 20 years | 10 Years | | |
| Total OC & | 126 104 | 434,943 | | |
| MC | 136,104 | | | |
| Total FC | None | 624,447 | | |
| Total RC | None | 43,980 | | |
| TC | 229,704 | 1,130,370 | | |
| SV | 11,379.6 | 3,254.5 | | |
| LCC | 218,324.3 | 1127,116 | | |

Table 7. Cost comparison of the two systems

The life cycle cost of a solar water pumping system is only 218,324.3 ETB. But, for the diesel based water pumping system, it is very high and found 1127,116 ETB. Therefore, the solar water pumping system is recommended for the installation. Therefore, it is proved that solar powered irrigation is economically feasible.

3.1 Cost Comparison of the two systems

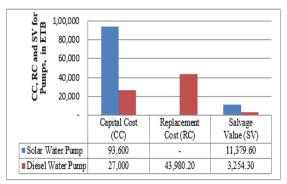



The graphical representation in Figure 3 and Figure 4 describes the cost comparisons of the two pumping systems based on data presented in Table 2.

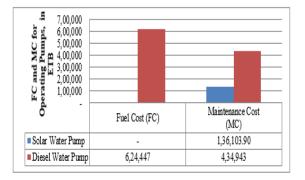


Fig.4 Comparison of fuel cost, maintenance cost of the two pumping systems

Figure 3 and Figure 4 show that the solar water pumping system has the advantage of no replacement cost, since its lifetime is nearly 20 years. Whereas, the diesel based water pumping system needs to be replaced after 10 years. Another advantage of the solar pump is its high salvage value. The farmer can get a massive return after its lifetime. The additional advantage of a solar pump is no fuel cost. Because it purely dependents on solar radiation. Whereas, the diesel based water pumping system requires diesel as fuel and is costly. Furthermore, the maintenance cost for solar pumps is less. It is significantly high for diesel based water pumping systems due to its high operating temperatures and various energy conversions. The only disadvantage of the solar water pumping system is its high installation cost for pumping the same volume flow rates.

3.2 Total cost and life cycle cost of the two pumping systems

Figure 5 shows that the total cost of the diesel based water pumping system is higher than the solar water pumping system. It is due to more fuel cost, maintenance cost, and replacement cost. Therefore, diesel based pump is less suited for the installation. It implies, the LCC of the solar water pumping system is considerably less, and therefore, it is best suited for the installation.

3.3 Break Even Point (BEP) Solar Water Pumping System and its Analysis

BEP of any system indicates no profit and no loss. The intersection of the total cost line and the total revenue line is the BEP of that system and shown in Figure 6. In this case, the cost is taken on the ordinate in ETB, and the lifetime of the pumping system is taken on the abscissa in years.

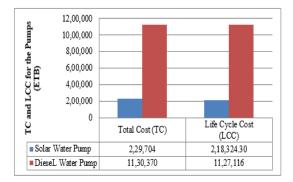


Fig.5 Total cost and life cycle cost of solar and diesel based water pumping system

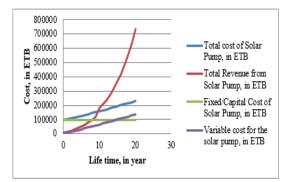


Fig.6 Graphical representation of breakeven point for solar water pumping system

In this study, the cumulative cash outflow can be considered as the total variable cost of the system. Similarly, cumulative cash inflow can be considered as the total revenue of the system. In order to indicate BEP, the particulars of expenditures and revenues were used and show in Figure 6.

As shown in Figure 6, the BEP is found on X axis at nine years and six months and it coincides with the payback period of the system. And, the results indicate that the total expenditure incurred over the system can be recovered within this period of time. After this time, the system results in more profits.

4. CONCLUSION

The following conclusions were drawn from the study The diesel based water pump requires 200 liters/year of diesel to supply water to 0.5-hectare land. But, no fuel is required for supplying water by a solar pump. It is a significant saving due to the solar pump. During the 20 years span, the total expenditure for the solar water pumping system was only 229,074 ETB, whereas for the diesel based water pumping system it was high and found 1130,370 ETB. Excluding the salvage value, the LCC of the solar water pumping system was found. For the solar water pumping system, it was only 218,324.3 ETB. But, for the diesel based water pumping system, it was very high and determined to be 1127,087.6 ETB. The system with high PI results in massive returns. In the present analysis, the PI of the solar water pumping system was 3.2, whereas for the diesel based water pumping system it was only 0.06. The PBP of the solar water pumping system was nine years and six months. From the BEP analysis, it was found that the system starts generating profits at the same time after the installation. Considering the above-stated advantages, technical and economic feasibility the solar water pumping system is the best choice for the installation when compared to a diesel water pumping system working under the same operating conditions.

ACKNOWLEDGEMENTS

The authors express their appreciation and sense of gratitude to the Kombolcha Institute of Technology (KIoT), Department of water and irrigation. Further, authors would like to express their sincere thanks to farmers for providing the necessary information for developing this article -We hereby confirm that all the Figures and Tables in the manuscript are ours. Besides, the Figures and images, which are not ours, have been given the permission for re-publication attached with the manuscript.

AUTHOR CONTRIBUTIONS

This work was carried out in collaboration between all authors. Mr. Hailemariam Berhanu generated the idea, diagnosis the cases then collected the data, wrote, and doing the design analysis with interpretation. Mr. Fiseha Bogale edited the manuscript with revision and proofreading. Mr Alemshet Abebe drafted the manuscript with revision idea. All authors read and approved the final manuscript.

CONFLICT OF INTEREST

The authors declare no conflict of interest.

REFERENCES

- Adugna Eneyew, Yusuf Kedir GIZ, "Solar irrigation market analysis in Ethiopia," International Renewable Energy Agency, 2020.
- [2] Rodrigo Barraza Vicencio, Aldo Barrueto Guzmán, "A cost-effective methodology for sizing solar pv systems for existing irrigation facilities in Chile," MDPI energies, July 2018.
- [3] Amrit Karki and Sunil Prasad Lohani, "Techno-Gokhale, "Solar-powered agriculture pumps and its economic analysis of solar water pumping system for irrigation in Nepal," Kathmandu University Journal of Science, Engineering and Technology, vol. 14, no. 2, Dec 2020.
- [4] D.C. economic feasibility," International Conference Proceeding ICGTETM, Dec 2017.
- [5] S. Urânio Mahanjane and J. Diana Neves Rosa Chilundo, "Design and performance of photovoltaic water pumping systems:," Journal of Power and Energy Engineering, pp. 32-63, 2018.
- [6] Ramazan Senol, "An analysis of solar energy and irrigation systems in Turkey." Energy Policy, 2012.

- [7] Abhishek Jain Shalu Agrawal, "Sustainable deployment of solar irrigation pumps: Key determinants and strategies," WIREs Energy Environ.WILEY, July 2018.
- [8] Willington Ortiz and Ramchandra Bhandari Javier Cuellar, "Techno-economic feasibility study of solar and wind based irrigation systems in Northern Colombia," World Sustainability Forum 2014 – Conference Proceedings Paper, Nov 2014.
- [9] D. C. Gokhale and R. D. Gokhale, "Solar-powered agriculture pumps and its economic Feasibility," in International Conference Proceeding ICGTETM, Jalgaon, India, Dec 2017.
- [10] Ndeulita Naukushu and Eveth Nwobodo Anyadiegwu, "Enhancing agriculture productivity using Solar Irrigation Technology: Soy beans farming in Namibia.," in Proceedings of the International Conference on Industrial Engineering and Operations Management, South Africa, Pretoria, pp.909, Nov 2018.
- [11] M. Shoeb Hassana, M. Abdul Mottalibb, Sultan Ahmmedc and M. Ayub Hossaina, "Technical and economic feasibility of solar pump irrigations for eco-friendly environment," International Conference on Thermal Engineering, www.sciencedirect.com, 2014.
- [12] Rathore and M. Lad Narale, "Techno economic assessment of solar photovoltaic water pumping system," International Journal of Agricultural Engineering, Volume 7 Issue 1, pp. 1-6, April 2014.
- [13] Pablo Benitez, Seneshaw Tamru and Haileselassie Medhin Andualem Telaye Mengistu, "exploring carbon pricing in developing countries: A macroeconomic analysis in Ethiopia," MDPI Sustainability, August 2019.
- [14] Wen-Hsien Tsai, "Carbon emission reduction carbon tax, carbon trading, and carbon offset," Energies MDPI, Nov 2020.

- [15] N. Roy, A.Beg, and B.K. Das Hoque, "Technoeconomic evaluation of solar irrigation plants installed in Bangladesh.," International Journal of Renewable Energy Development, vol. 5, no. 1, pp. 73-78, 2016.
- [16] Mohd. Tareek-ul-Islam Khan and Bishwajit Banik Pathik, "A comprehensive study on photovoltaic irrigation system for different crop cultivation: Financial evaluation perspective," Journal of Electrical Engineering, vol. 2, 2014. doi:10.17265/2328-2223/2014.05.005
- [17] Paul G. Dembling, NASA Web Site, March, 2021.[Online]. https://power.larc.nasa.gov/data-access-viewer/
- [18] N.S.Rathore, M.M. Lad and P.D.Narale, "Techno economic assessment of solar photovoltaic water pumping System," vol. 7, no. 1, April, 2014.
- [19] H.Bierman, "Capital budgeting in 1992: A survey." Financial Management, 22(3), 24- 24, 1993. http://www.jstor.org.unco.idm.oclc.org/stable/3665921
- [20] Eric Gilbertson, Anwar Sheikh, D.Steven Eppinger, Steven Dubowsk, C.Leah and A.Kelley,"On the feasibility of solar-powered irrigation,"Renewable and Sustainable Energy Reviews,July 2010.